



-	- DU N	<b>T</b> N	U <b></b>	N
DUPONT		OFOAM ─ <sub>N</sub> <sup>U</sup> ◄		
	N	N D		

### DESCRIPTION

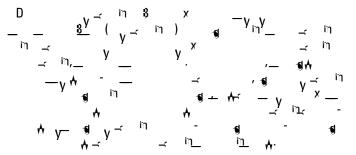

#### **APPLICATIONS**




• \_ + 1

v – in x \_\_\_\_.H ng , ↔ : 7./x 14./(18 in x 36 in) 8./x 16./(20 in x 41 in) 10./x 20./(25 in x 51 in) ▼ ng : 9'(2.75 in)


### AVAILABILITY

y ∽ <sup>m</sup> − s F N <del>^</del>


# INSTALLATION



′ x

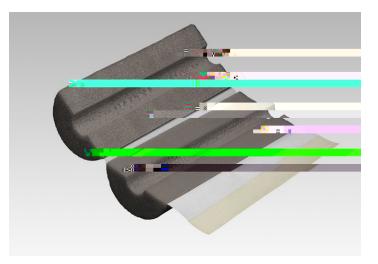


# **PHYSICAL PROPERTIES**

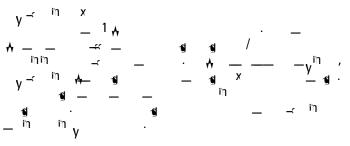

## **ENVIRONMENTAL DATA**




## FIRE PROTECTION & SAFETY CONSIDERATIONS



#### Johns

717 17 D , 80202 (800) 866-3234 in

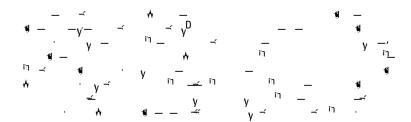

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville thermal insulation and systems, visit www.jm.com/terms-conditions or call (800) 654-3103.