

C DA D AD (/)


Pressure		Deflection Under Load	Permanent Consolidation
psi	kPa		
200	1,379	0.008	0.002
500	3,448	0.014	0.002
1000	6,895	0.022	0.003
2000	13,790	0.059	0.005
3000	20,685	0.120	0.057
4000	27,580	0.243	0.164
5000	34,475	0.325	0.248
6000	41,370	0.364	0.287
7000	48,265	0.412	0.337

A A



717 17th St.
 Denver, CO 80202
 (800) 866-3234
 JM.com

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The physical and chemical properties of the Super Firetemp® X listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Any references to numerical flame spread or smoke developed ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions. Check with the Regional Sales Office nearest you for current information.

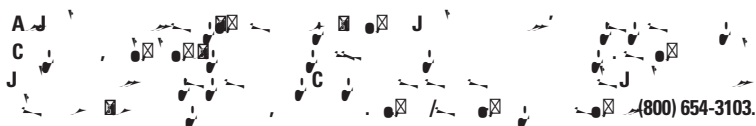

(800) 654-3103