

DESCRIPTION


Kraft facing is Extensible Kraft paper coated on one side with a thermoplastic asphalt coating. The asphalt coating is used to bond berglass insulation to the facing in a subsequent manufacturing process. The uncoated side is normally printed with the manufacturer's logo (available upon request).

APPLICATION

This product is typically used as a facing for residential building applications.

CONSTRUCTION

Basis Weight	17.6 lbs/MSF (85.9 g/m ²)
Extensible Kraft paper	35 lbs/3000 ft ² (57 g/m ²)
Asphalt Coating	Full Coat

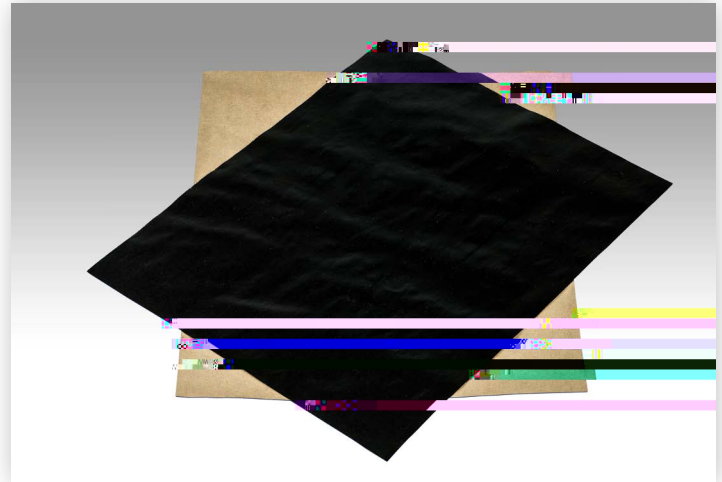

SPECIFICATIONS

